


B242105 & L242005 - DAIRY LOFTY WRAP END x 05

CASE STANDARD SPEC:




- INTERNAL CASE COLOUR
- BLACK KICK PLATE
- 5 x UNLIT BULLNOSE STAINLESS STEEL SHELVES
- T8/T5 CANOPY FLUORESCENT LIGHTS
- NO FENCES
- FLAT BOTTOM PAN & FRONT FENCE
- FRONT BAR
- THERMOSTATIC EXPANSION VALVE (BRASS)
- 2 x PROBES (AIR OFF & DEFROST)
- SHADED POLE FAN MOTOR (SPM)
- STANDARD COIL
- PLASTIC TICKET RAIL
- ELECTRONIC DISPLAY

CASE OPTIONAL SPEC:


- 40mm LOFTY FULL PATCH-END
- 40mm PATCH-END WITH FULL MIRROR (RECESS MIRROR)
- 40mm LOFTY PATCH-END WITH GLASS
- SS INTERIOR
- STANDARD STAINLESS STEEL SHELVES
- LED CANOPY LIGHTS: BRAVO NW HO 24V
- LED SHELF LIGHTS: FRT5 NW 4000K 24V
- CLADDING OPTIONS: REFER TO CLAD DETAILS DOCUMENT (AVAILABLE ON DEMAND)
- ECM FANS
- ELECTRONIC VALVE (EV)
- FRONT GLASS

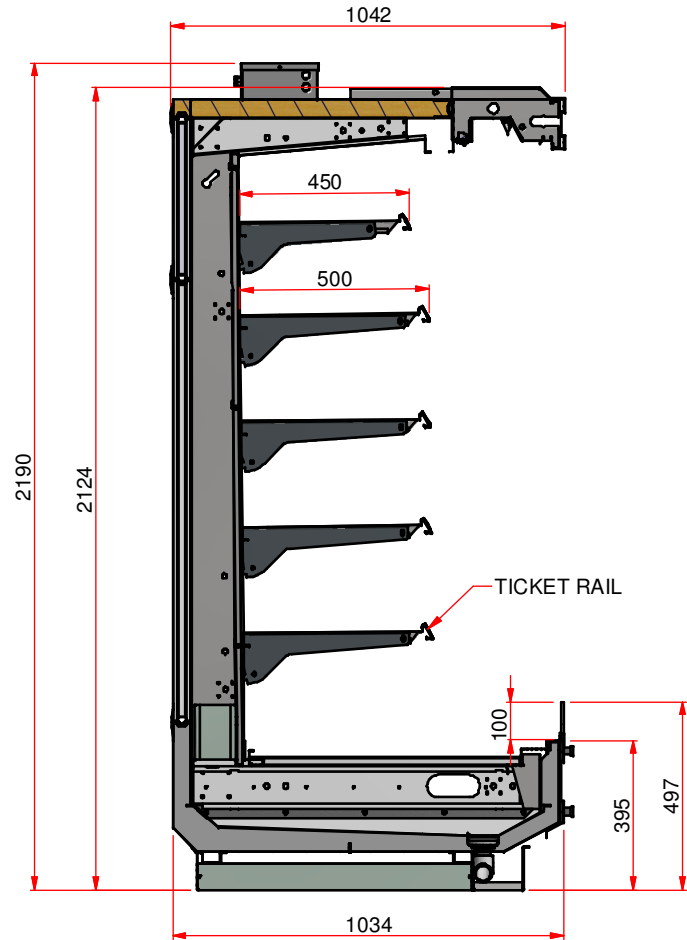

SIDE SECTION VIEW

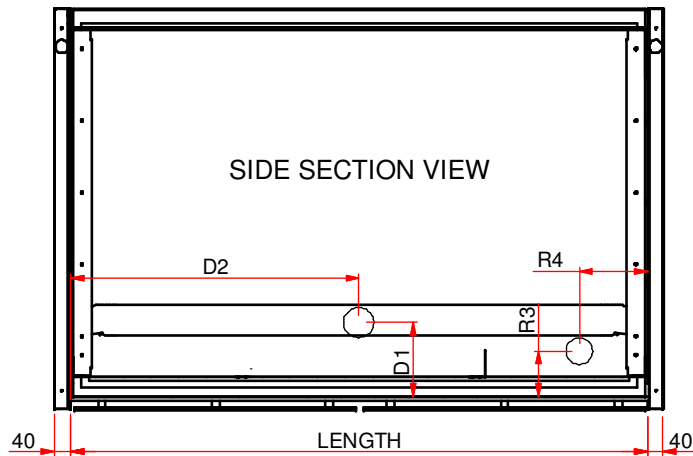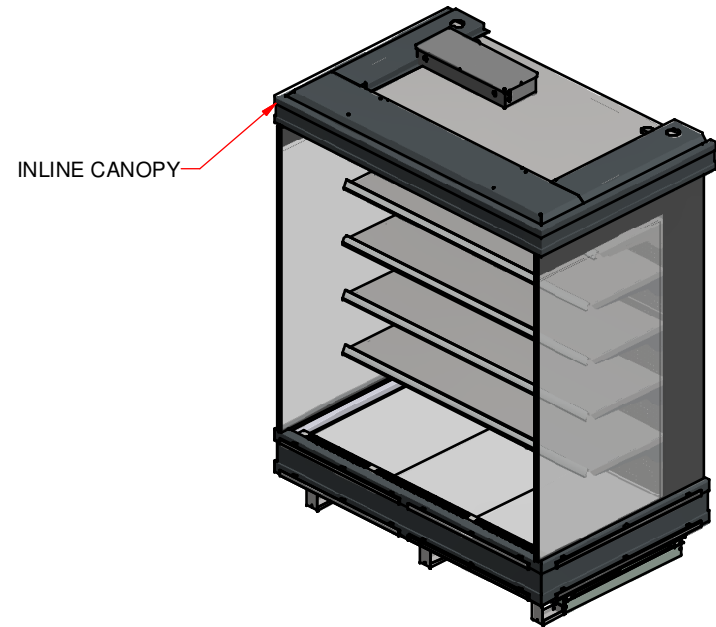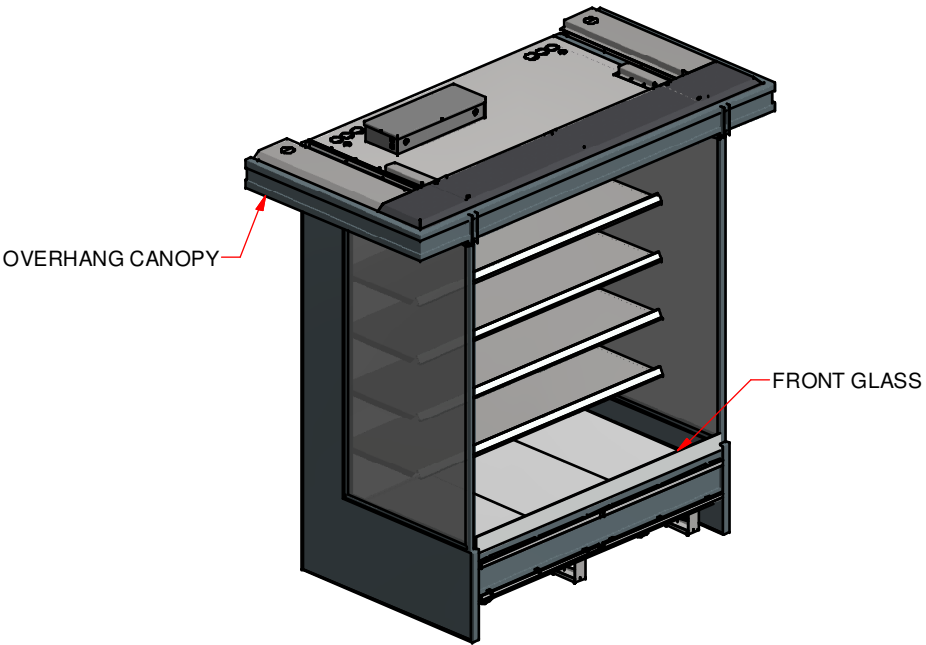

SIDE SECTION VIEW

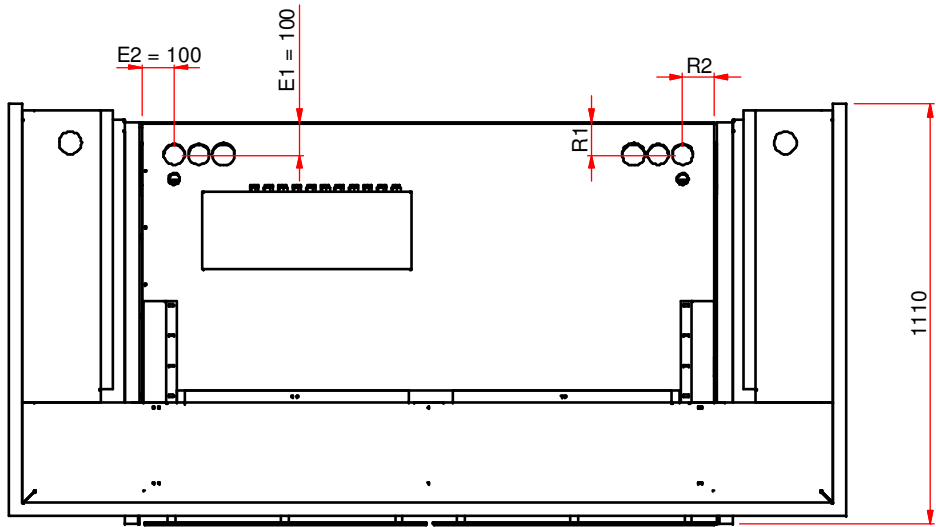

NOTE  
COLOURS USED FOR REPRESENTATION PURPOSE ONLY

| Refrigeration Requirements |                  |
|----------------------------|------------------|
| REFRIGERATION              | EVAPORATION TEMP |
| 480 W/ft                   | -6 °C            |

\* Optional

| Physical Properties |            |          | Drain Points and Refrigeration Points |        |               |               |               |               | Electrical Specifications           |  |                   |                    |                         |
|---------------------|------------|----------|---------------------------------------|--------|---------------|---------------|---------------|---------------|-------------------------------------|--|-------------------|--------------------|-------------------------|
| Size                | Length (m) | TDA (m²) | D1                                    | D2     | R1 (Top exit) | R2 (Top exit) | R3 (Btm exit) | R4 (Btm exit) | Evaporator Fans                     |  | Heaters           | Heaters            | Lighting                |
|                     |            |          |                                       |        |               |               |               |               | Fan Blade + Motor                   |  | Anti-Sweat        | Defrost**          | Canopy (LED)            |
| 5FT                 | 1.515      | 2.67     | 200 mm                                | 760 mm | 100 mm        | 100 mm        | 150 mm        | 180 mm        | 2 x Φ230-31"/60W (SPM) or 24W (ECM) |  | 1 x 7 W/m x 3.2 m | 1 x 1000W [1230mm] | 1 x 32W + 2 x 18W = 68W |



| Case Range                                                                                          | Case Description |            |
|-----------------------------------------------------------------------------------------------------|------------------|------------|
| B24XXCS                                                                                             | DAIRY LOFTY END  |            |
| PAGE 1<br>OF 1                                                                                      | Revision 00      | 2018/01/18 |
| INTELLECTUAL PROPERTY OF COLCAB (PTY) LTD<br>FORMATION SHOWN SUBJECT TO CHANGE WITHOUT PRIOR NOTICE |                  |            |