


BA252004 & LN252004 - DAIRY LOFTY NARROW (800) x 04
BA252006 & LN252006 - DAIRY LOFTY NARROW (800) x 06
BA252008 & LN252008 - DAIRY LOFTY NARROW (800) x 08
BA252012 & LN252012 - DAIRY LOFTY NARROW (800) x 12

CASE STANDARD SPEC:


- INTERNAL CASE COLOUR
- BLACK KICK PLATE
- 5 x UNLIT BULLNOSE STAINLESS STEEL SHELVES
- LED CANOPY LIGHTS: BRAVO NW HO 24V
- FLAT BOTTOM PAN WITH FRONT FENCE
- THERMOSTATIC EXPANSION VALVE (BRASS)
- 2 x PROBES (AIR OFF & DEFROST)
- SHADED POLE FAN MOTOR (SPM)
- STANDARD COIL
- ELECTRONIC TEMP. DISPLAY
- PLASTIC TICKET RAIL
- FRONT RAISER GLASS

CASE OPTIONAL SPEC:


- 40mm LOFTY FULL PATCH-END
- 40mm LOFTY PATCH-END WITH GLASS
- CLADDING OPTIONS: REFER TO CLAD DETAILS DOCUMENT (AVAILABLE ON DEMAND)
- SS INTERIOR
- STANDARD STAINLESS STEEL SHELVES
- ALUMINIUM TICKET RAIL
- LED CEILING LIGHTS: FRT5 NW HIGH CRI 24V (INLINE CANOPY)
- LED SHELF LIGHTS: FRT5 NW 4000K, 24V (MANDATORY FOR INLINE CANOPY) (OPTIONAL FOR EXTENDED CANOPY)
- ECM FANS
- ELECTRONIC VALVE (EV)
- T8/T5 CANOPY FLUORESCENT LIGHTS (ONLY ON EXTENDED CANOPY)
- SS INTERIOR
- ACRILIC DOORS (DOUBLE COOL)
- MANUAL NIGHT BLIND
- SHELF FENCES

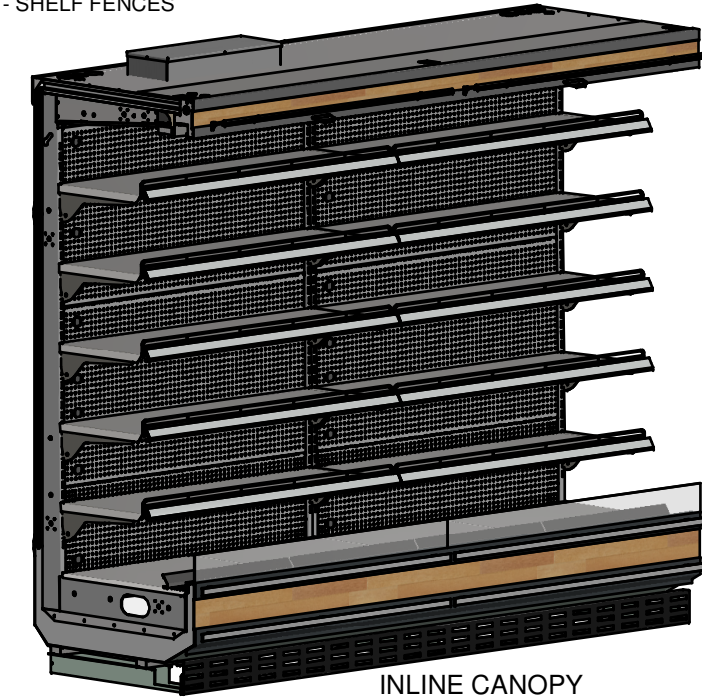


INLINE CANOPY

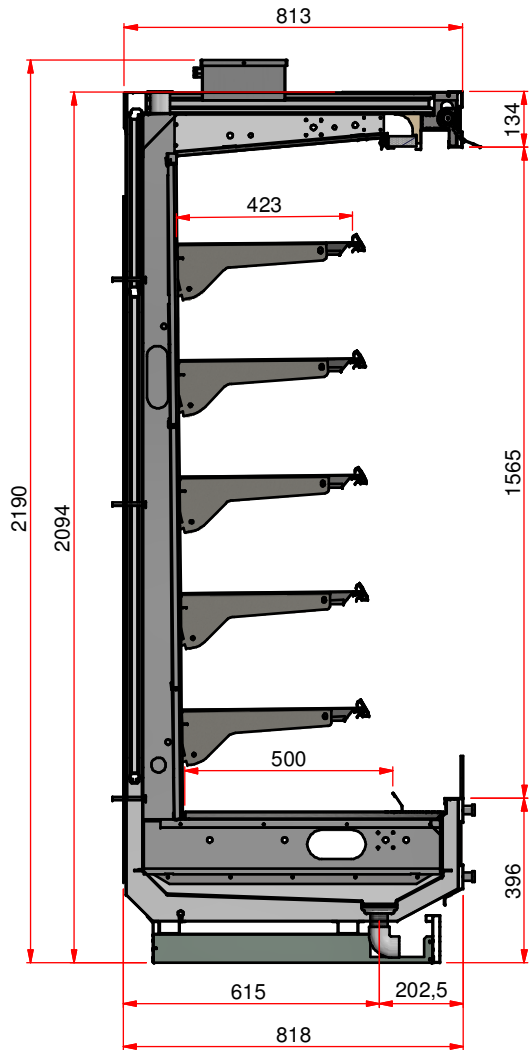


SIDE SECTION VIEW: INLINE CANOPY

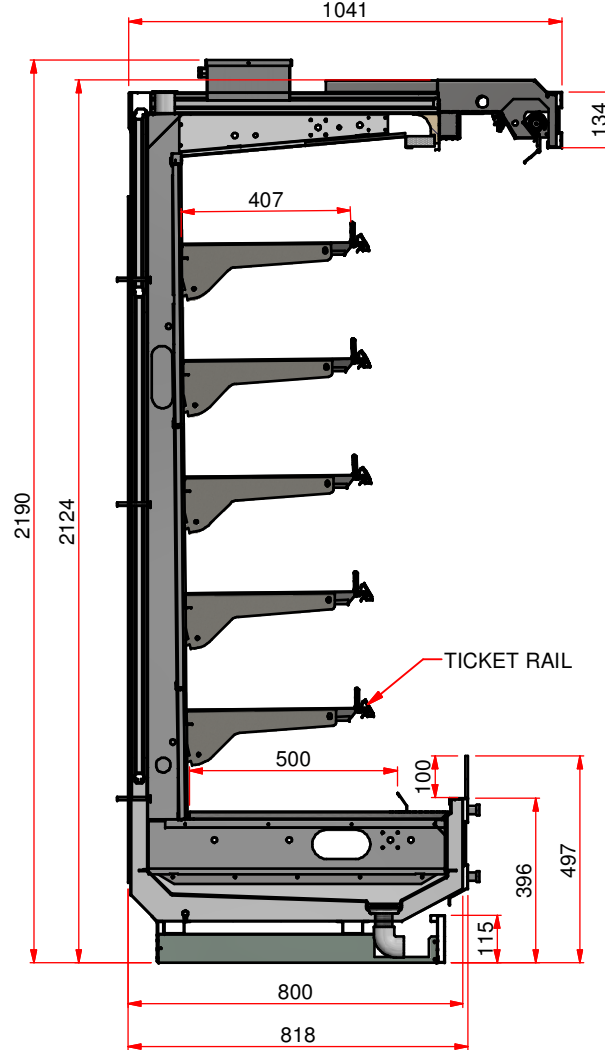


SIDE SECTION VIEW: EXTENDED CANOPY

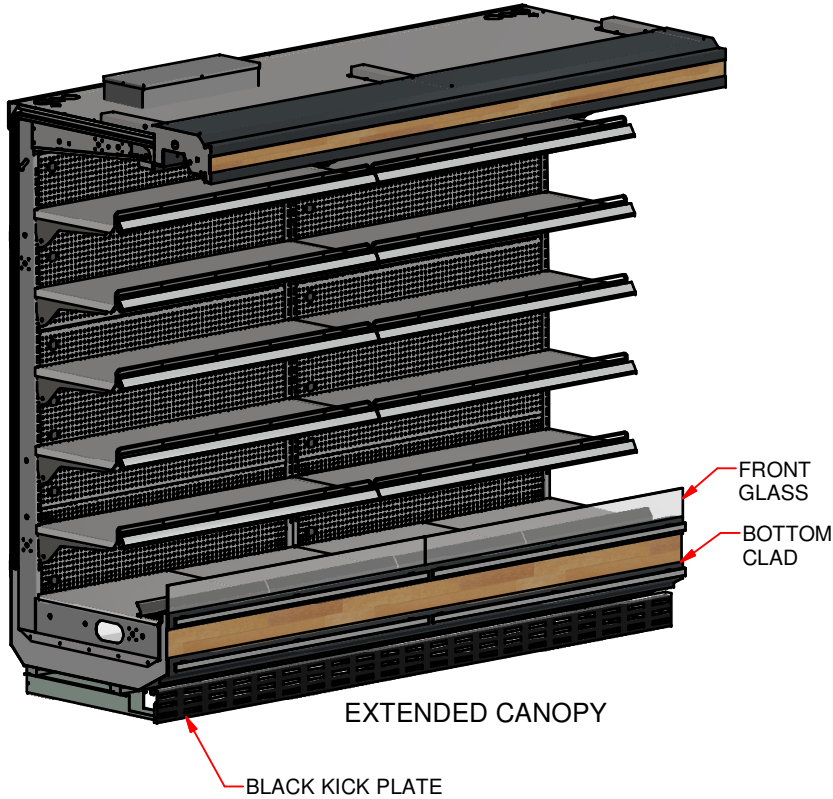

EXTENDED CANOPY

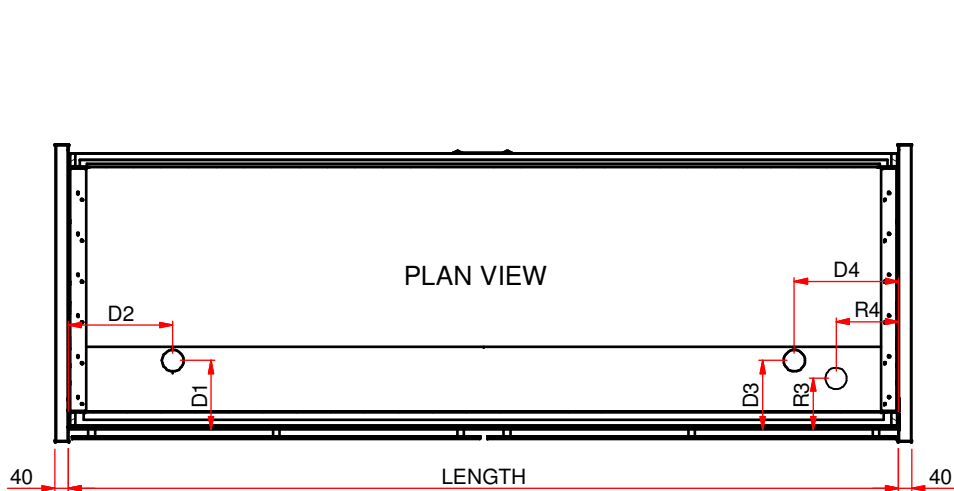

PLAN VIEW

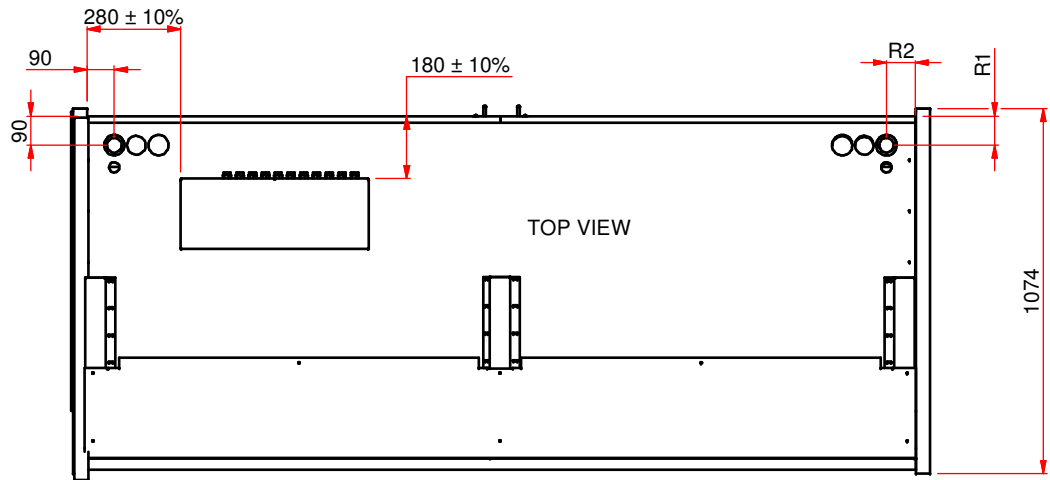

TOP VIEW

NOTE
COLOURS USED FOR REPRESENTATION PURPOSE ONLY

Refrigeration Requirements		
PRODUCT	REFRIGERATION	EVAPORATION TEMP
Dairy	390 W/ft	-6 °C
Meat	405 W/ft	-8 °C

Physical Properties			Drain Points and Refrigeration Points								Electrical Specifications				
Size	Length (m)	TDA (m²)	D1	D2	D3	D4	R1 (Top Exit)	R2 (Top Exit)	R3 (Btm Exit)	R4 (Btm Exit)	Evaporator Fans		Heaters	Heaters	Lighting*
											Fan Blade + Motor		Anti-Sweat	Defrost**	Canopy (LED)
4FT	1.22	1.98	200 mm	610 mm	-	-	100 mm	90 mm	150mm	180mm	2 x Φ200-28"/36W (SPM) or 24W (ECM)		1 x 7 W/m x 2.0 m	1 x 800W	1 x 4FT = 25W
6FT	1.83	3.00	200 mm	300 mm	200 mm	300 mm	100 mm	90 mm	150mm	180mm	3 x Φ200-28"/36W (SPM) or 24W (ECM)		1 x 7 W/m x 3.2 m	1 x 1200W	2 x 3FT = 36W
8FT	2.44	3.96	200 mm	300 mm	200 mm	300 mm	100 mm	90 mm	150mm	180mm	4 x Φ200-28"/36W (SPM) or 24W (ECM)		1 x 7 W/m x 4.88 m	1 x 1600W	2 x 4FT = 50W
12FT	3.66	5.95	200 mm	300 mm	200 mm	300 mm	100 mm	90 mm	150mm	180mm	6 x Φ200-28"/36W (SPM) or 24W (ECM)		1 x 7 W/m x 7.3 m	1 x 2400W	3 x 4FT = 75W

COLCAB CAPE TOWN Buttskop Road Blackheath Tel: +27 (21) 907-2800 Fax: +27 (21) 907-2850 info.cpt@colcabct.co.za	Case Range	Case Description	
	B2520	DAIRY LOFTY 800	
	PAGE 1 OF 2	Released by G.B.	Released date 2018/01/18
		Revision R00	Revision date 2018/01/18
INTELLECTUAL PROPERTY OF COLCAB (PTY) LTD INFORMATION SHOWN SUBJECT TO CHANGE WITHOUT PRIOR NOTICE			



 COLCAB UNDEVELOPED OPPORTUNITIES AVAILABLE FOR LICENSING CAPE TOWN Buttskop Road Blackheath Tel: +27 (21) 907-2800 Fax: +27 (21) 907-2850 info.cpt@colcabct.co.za	Case Range	Case Description	
	B2520	DAIRY LOFTY 800	
	PAGE 2 OF 2	Released by G.B.	Released date 2018/01/18
		Revision R00	Revision date 2018/01/18
INTELLECTUAL PROPERTY OF COLCAB (PTY) LTD INFORMATION SHOWN SUBJECT TO CHANGE WITHOUT PRIOR NOTICE			