

BA350503 - INTEGRATE 3 DOOR FREEZER
BA350504 - INTEGRATE 4 DOOR FREEZER

- CASE STANDARD SPEC:**
- INTERNAL CASE COLOUR
 - BLACK KICK PLATE
 - 4 x POWDER COATED WIRE SHELVES
 - INTEGRATE GDF BASKET
 - 2 x 50mm SOLID PATCH-ENDS
 - GLACIER DOORS FRAMES WITH LED LIGHTS
 - SPIRAL DEFROST HEATER (NOT REQUIRED ON CHILLER)
 - 2 x CALROD DEFROST ELEMENTS (ONLY ONE ELEMENT REQUIRED ON CHILLER)
 - THERMOSTATIC EXPANSION VALVE (BRASS)
 - 2 x PROBES (AIR OFF & DEFROST)
 - SHADED POLE FAN MOTOR (SPM)
 - STANDARD COIL
 - ALUMINIUM TICKET RAIL
 - ELECTRONIC DISPLAY


- CASE OPTIONAL SPEC:**
- ECM FANS
 - ELECTRONIC VALVE (EV)
 - STAINLESS STEEL WIRE SHELVES
 - STAINLESS STEEL SHELVES
 - CLADDING OPTIONS: REFER TO CLAD DETAILS DOCUMENT (AVAILABLE ON DEMAND)

SHELVES LOAD VOLUME & QUANTITY

- SINGLE GD WIRE TOP TRAY: 766 x 424 x 230 = 0.0747 m³
- SINGLE GD WIRE BTM TRAY: 766 x 285 x 230 = 0.0502 m³
- 4 DOOR SHELVES: (12 x 0.0747 m³) + (4 x 0.0502 m³) = 1.097 m³
- 3 DOOR SHELVES: (9 x 0.0747 m³) + (3 x 0.0502 m³) = 0.823 m³
- 2 DOOR SHELVES: (6 x 0.0747 m³) + (2 x 0.0502 m³) = 0.549 m³

BASKET LOAD VOLUME & QUANTITY

- SINGLE BASKET: 752 x 584 x 330 = 0.145 m³
- 4 DOOR BASKET: 4 x 0.145 m³ = 0.580 m³
- 3 DOOR BASKET: 3 x 0.145 m³ = 0.435 m³
- 2 DOOR BASKET: 2 x 0.145 m³ = 0.290 m³

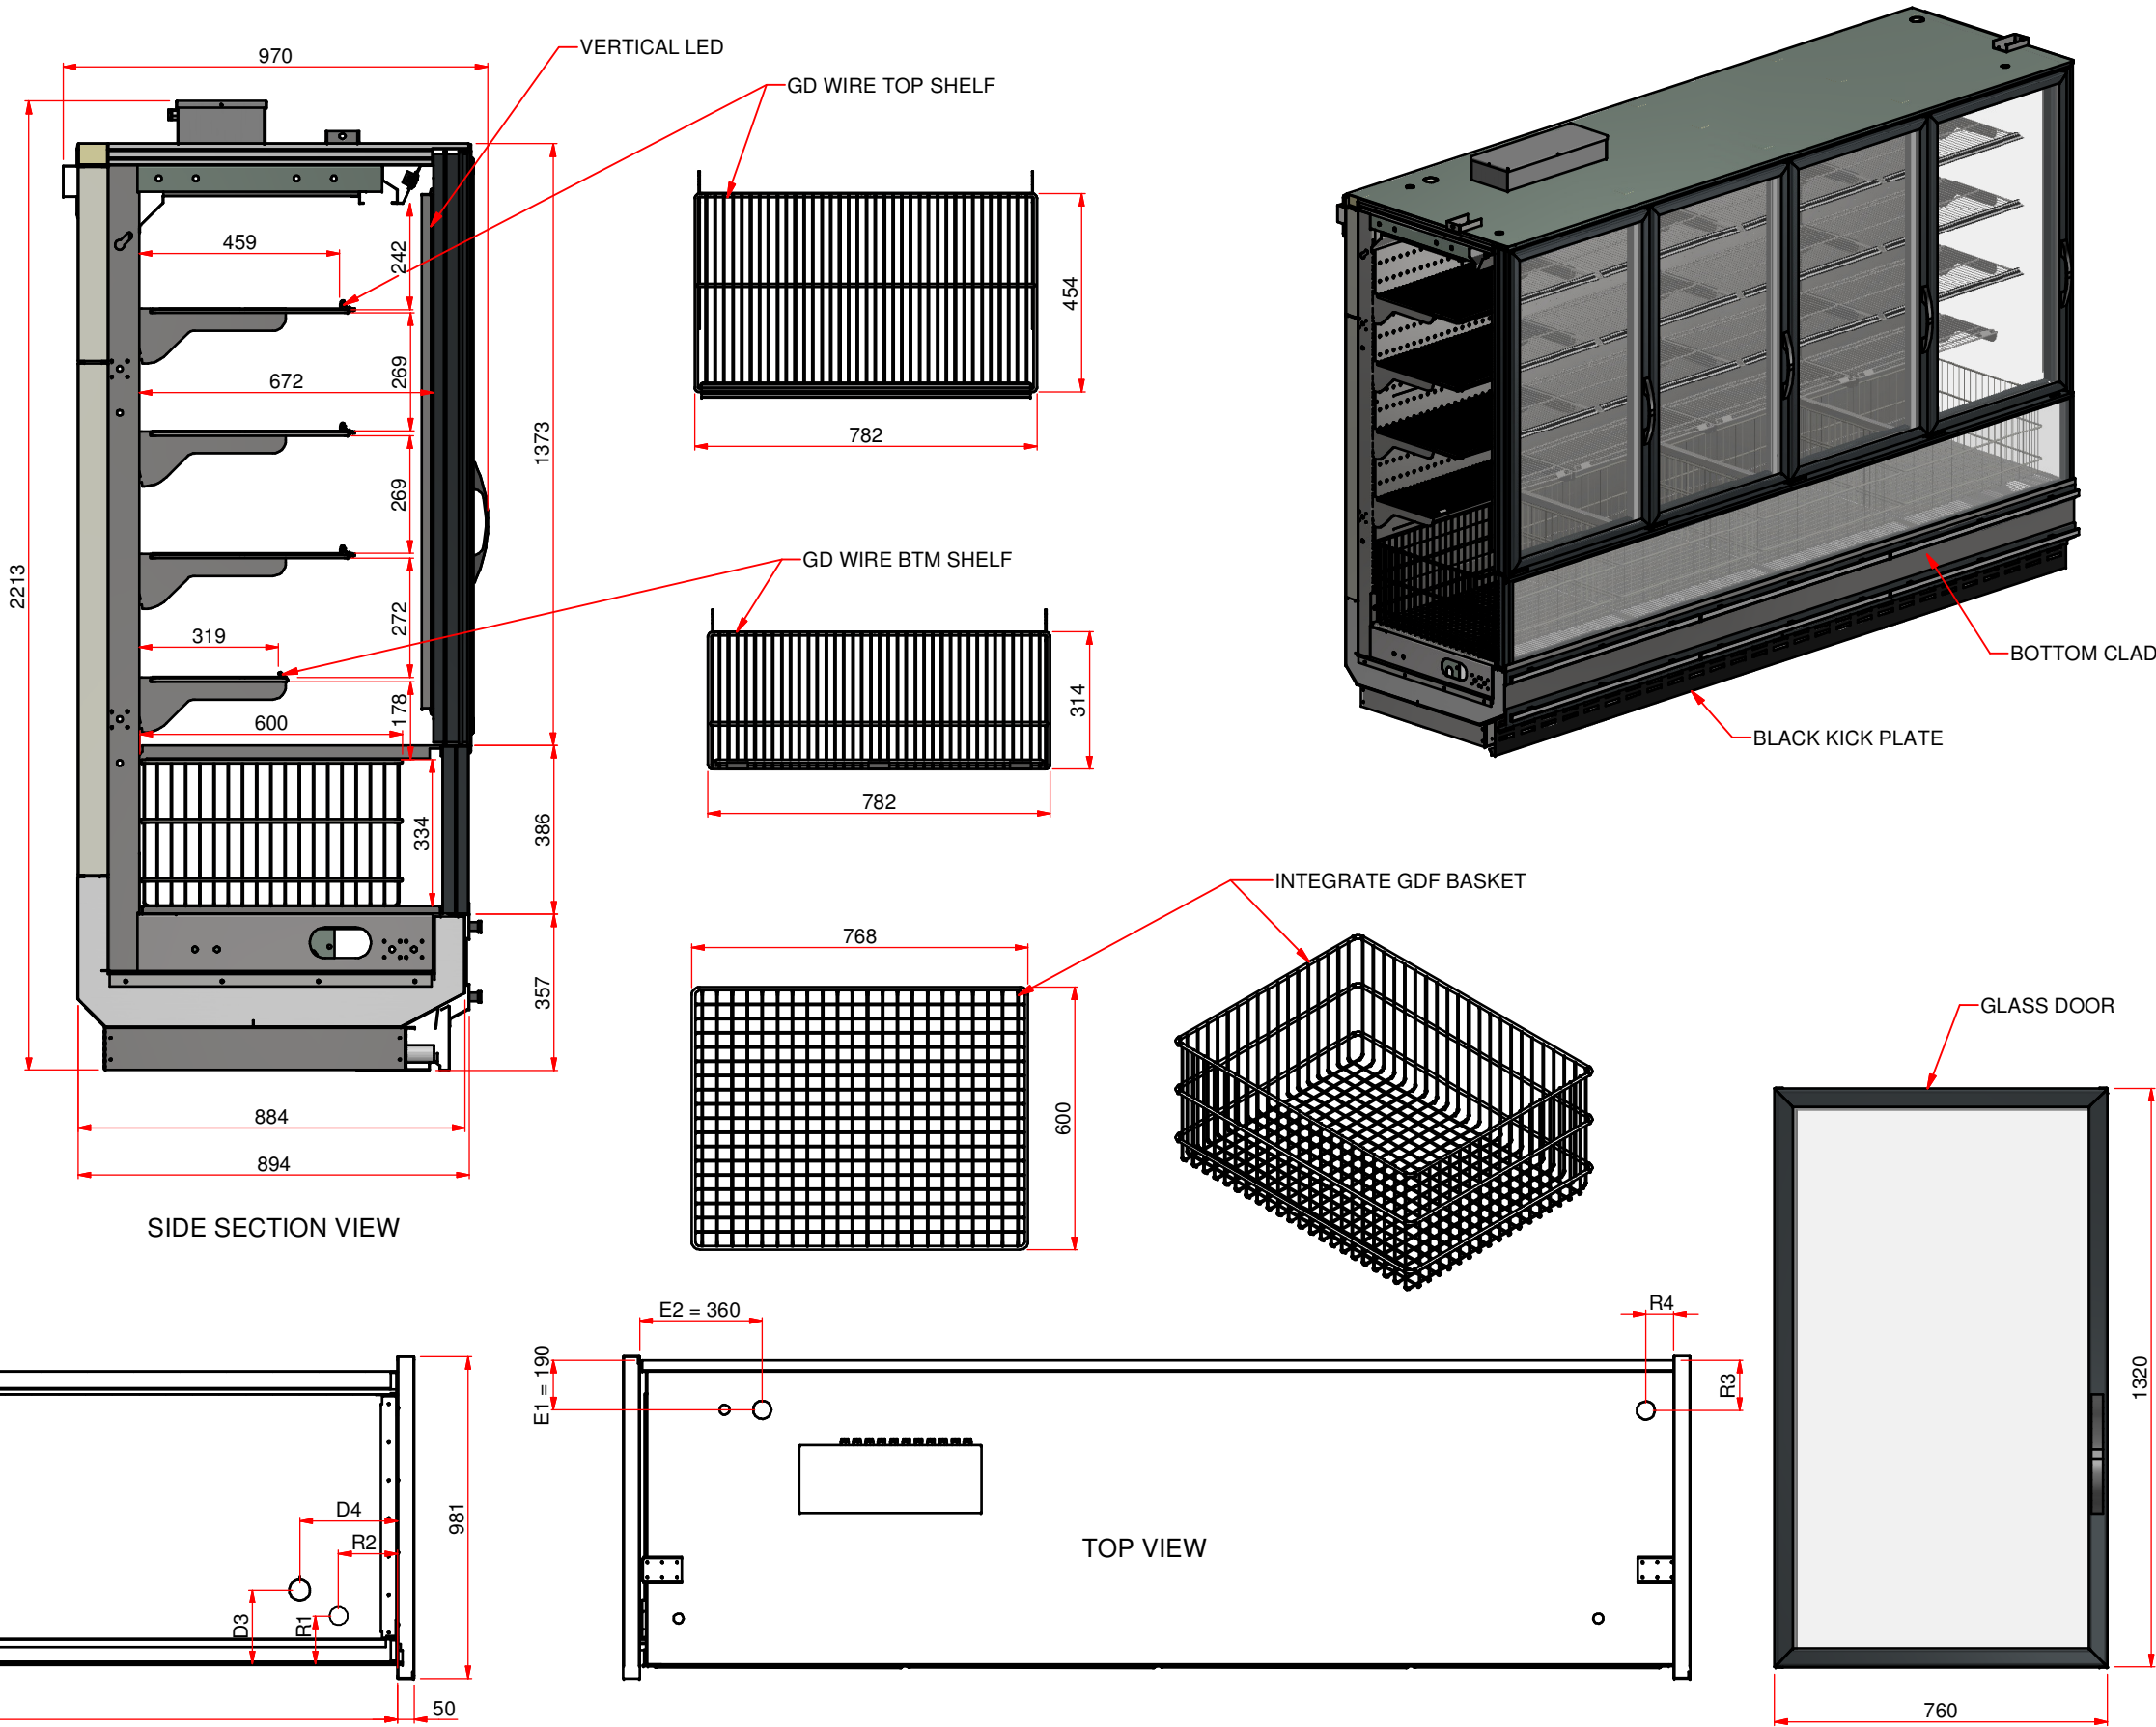

NOTE
COLOURS USED FOR REPRESENTATION PURPOSE ONLY

Refrigeration Requirements		
CASE	REFRIGERATION	EVAPORATION TEMP
Freezer	645 W/Door or 260W/ft	-32°C
Freezer - I/Cream	645 W/Door or 260W/ft	-37°C

Physical Properties			Drain Points, Electrical Points and Refrigeration Points									Electrical Specifications						
Size	TDA (m²)	Load Volume (m³)	Length (m)	D1	D2	D3	D4	R1	R2	R3	R4	Evaporator Fans		Heaters	Heaters	Heaters	Heaters	Lighting
								Btm exit	Btm exit	Top exit	Top exit	Fan Blade + Motor		Defrost	Frame & Doors	Drain	Anti-sweat	Frame (LED)
2 DOOR	1.72	1.114	1.579	220 mm	300 mm	220 mm	300 mm	150 mm	180 mm	100 mm	120 mm	2 x Φ200-28"/36W (SPM) or 24W (ECM)		2600W	791W	2 x 10W	2 x 51W	48W
3 DOOR	2.59	1.450	2.364	220 mm	300 mm	220 mm	300 mm	150 mm	180 mm	100 mm	120 mm	3 x Φ200-28"/36W (SPM) or 24W (ECM)		4000W	1120W	2 x 10W	2 x 78W	64W
4 DOOR	3.45	1.929	3.144	220 mm	300 mm	220 mm	300 mm	150 mm	180 mm	100 mm	120 mm	4 x Φ200-31"/36W (SPM) or 24W (ECM)		5200W	1384W	2 x 10W	2 x 117W	80W

 COLCAB COLLEGE OF QUALITY DISPLAY SOLUTIONS CAPE TOWN Buttskop Road Blackheath Tel: +27 (21) 907-2800 Fax: +27 (21) 907-2850 Info.cpt@colcabct.co.za	Case Range	Case Description	
	B3505	INTEGRATE GDF	
	PAGE 1 OF 2	Released by G.B.	Released date 2018/04/26
		Revision R00	Revision date 2018/04/26
		INTELLECTUAL PROPERTY OF COLCAB (PTY) LTD INFORMATION SHOWN SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	



 COLCAB (PTY) LTD QUALITY DISPLAY SOLUTIONS CAPE TOWN Butskop Road Blackheath Tel: +27 (21) 907-2800 Fax: +27 (21) 907-2850 Info.cpt@colcabct.co.za	Case Range	Case Description	
	B3505	INTEGRATE GDF	
	PAGE 2 OF 2	Released by G.B.	Released date 2018/04/26
		Revision R00	Revision date 2018/04/26
		INTELLECTUAL PROPERTY OF COLCAB (PTY) LTD INFORMATION SHOWN SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	